
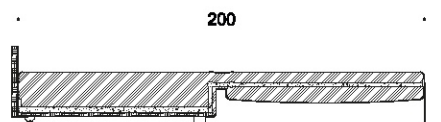
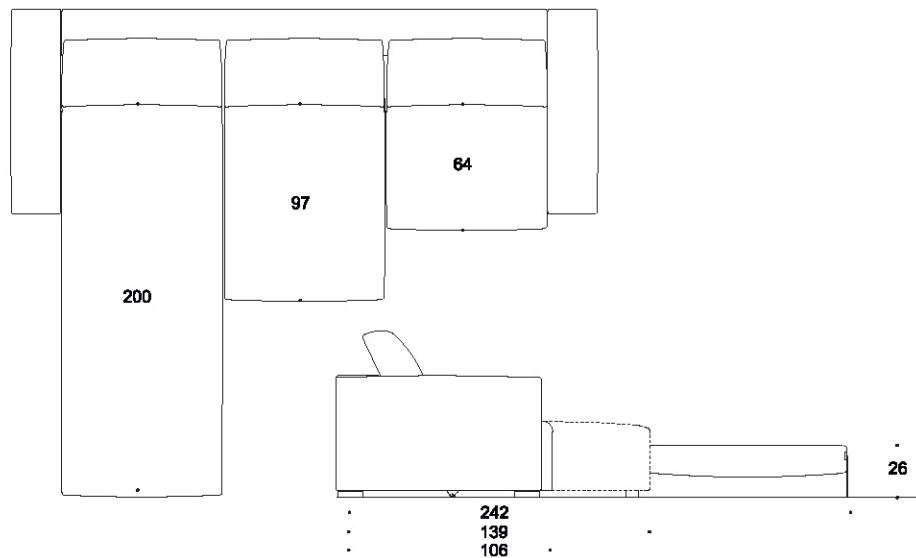


HARLEM

SCHEMA TECNICA

Technical sheet

70-80-95-105

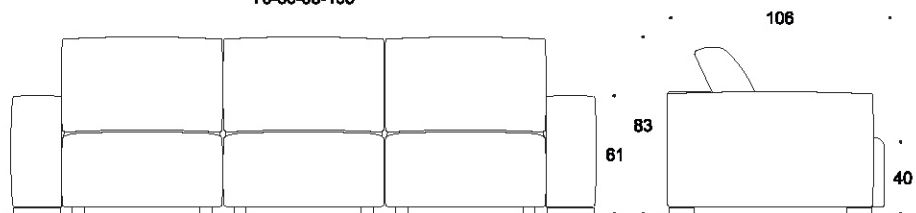


 Pannello in legno
Wooden base

 Tessuto / Pelle
Fabric / Leather

 Poliuretano a densità differenziata 28-35 kg/m³
28-35 kg/m³ differentiated density polyurethane foam

 Meccanica in acciaio
Fold-down function mechanism



 Fibra siliconata 200 gr/m²
200 gr/m² siliconized fibre

 Fusto in legno
Wooden frame

 Poliuretano soffice 18 kg/m³
18 kg/m³ polyurethane foam

 Piedi antiscivolo in legno
Non-slip wooden feet

 Poliuretano indeformabile 30 kg/m³
30 kg/m³ non-deformable polyurethane foam


 Poliuretano rivestito
Coated polyurethane

 Poliuretano indeformabile 40 kg/m³
40 kg/m³ non-deformable polyurethane foam

 Tessuto / Pelle
Fabric / Leather

CARATTERISTICHE FEATURES

- Rivestimento sfoderabile
Removable cover
- Cucitura A
Stitching A
- Piedini rettangolari cromati
Rectangular chromed feet



OPTIONAL



Piedini rettangolari in legno
Rectangular wooden feet



Imbottitura seduta rigida
Firm seat padding